

Contact Us: +1 (866) TRUENAS

Features



Scalable Performance & Capacity

The TrueNAS H-Series combines RAM and NVMe caching with HDDs for cost-effective storage, and supports SAS or NVMe SSDs for up to 8 GB/s uncached throughput.



Self-Healing Data Protection

TrueNAS detects and repairs data corruption and bit rot automatically to ensure data integrity.



Intelligent Storage Optimization

TrueNAS uses compression, deduplication, and thin provisioning to maximize efficiency and dynamically adjusts compression based on resource use.



Unlimited Snapshots & Replication

TrueNAS offers unlimited snapshots and replication without extra licensing, with built-in ransomware protection and seamless integration with VMware.

Benefits



High Availability (HA)

The TrueNAS H-Series offers dual-controller configurations to ensure uninterrupted access to critical data during maintenance or hardware failures.



Unified Storage Protocols

With support for file, block, and S3-compatible object protocols, enabling seamless integration with diverse enterprise applications and workflows has never been easier.



Enterprise-Grade Efficiency

Advanced features like data reduction, snapshots, and replication come standard, reducing costs and simplifying data management without additional licensing fees.

Versatile Hybrid Storage

The TrueNAS H-Series delivers the comprehensive feature set of TrueNAS Open Enterprise Storage, including High Availability (HA), at an entry-level price point. Designed for small and medium businesses, the H-Series offers optional dual controllers, hybrid or all-flash configurations, NVMe support in every bay for low-latency workloads, and unified file, block, and object storage across three models: H10, H20, and H30.

This flexibility allows organizations to scale performance and reliability in a compact footprint, making it suitable for IT environments and Edge deployments. The simplified web-based interface and robust feature set, coupled with the absence of additional licensing costs, make the H-Series an accessible yet powerful option for growing businesses.

The modular architecture of the H-Series supports hybrid flash and disk storage pools, conserving power, space, and cooling while handling diverse workloads such as media storage, virtual machine hosting, and video surveillance. Optional HA ensures uninterrupted storage services during maintenance or upgrades, while Intelligent Storage Optimization reduces data by 2.5x or more for maximum efficiency. With built-in data integrity features and the reliability of TrueNAS Enterprise, the H-Series provides businesses with scalable, efficient, and secure storage that is easy to manage and built to perform around the clock.





H-Series Platform

Available Storage Media

- Enterprise Nearline Hard Drives 7200 RPM SAS3:
 - Available from 8 TB to 22 TB oSED, FIPS 140-2 options
- Enterprise SSDs:
 - oSAS3: from 1.9 TB to 15.36 TB
 - •SED and FIPS 140-2 options available
- NVMe SSDs:
 - o from 3.8 TB TO 61.4 TB
 - •SED and FIPS 140-3 options available

Power Management


- Dual redundant, hot-swappable, high-efficiency (80 Plus Platinum (90%+) power supplies
- Auto-switching 100-240V 50/60Hz input power supported
- Remote power on/off via IPMI (Integrated Platform Management Interface)
- UPS signal response and alerts

Disk Management

- Global hot spares
- Hot-swappable drives
- Corrupted block scan + HDD S.M.A.R.T.
- Hard drive activity/alert LEDs
- Hardware-accelerrated disk encryption (AES-NI)
- Enclosure monitoring and alert LEDs

Physical Parameters

- 2U: 12× 3.5/2.5" hard drive bays (front-loading, hot swap)
- Dimensions (I x w x h):
 - ∘26.8" x 19" x 3.5" | 681 × 483 × 89 mm
- Rackmount Rails:
 - °23" 35.75" standard
- Operating temperature: 0°C to 40°C
- Non-operating temperature: -30°C to 60°C
- Humidity: 8% to 80% non-condensing
- Empty weight: 43 lbs | 19.5 kg
- Fully-Loaded weight: 67 lbs | 30.4 kg
- RoHS 6/6 compliant CE, FCC Class A, VCCI, UL, BSMI

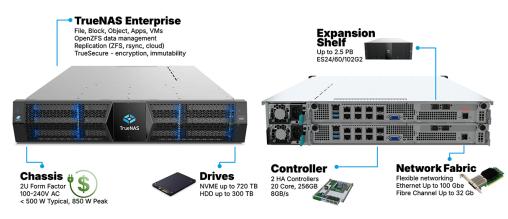

TrueNAS H30 shown above. Specifications may vary based on your selected model and configuration.

TrueNAS H-Series Models

	TrueNAS H10	TrueNAS H20	TrueNAS H30
Hybrid or All-Flash Storage		Optional	
Dual Controller (HA)		Optional	
Controller	4 Core	10 Core	20 Core
RAM (Max)	64 - 128 GB	128 - 256 GB	256 GB
Read Cache (Max)	3.2 TB NVMe SSD	2× 3.2 TB NVMe SSD	2× 6.4 TB NVMe SSD
Write Cache (Max)	NVMe SSD	NVMe SSD	2x NVMe SSD
Onboard Networking	4× 1G Base-T	4× 1G Base-T	4× 1G Base-T 2× 10G Base-T
Additional Networking (Optional)	Up to 4× 10/25 GbE	Up to 4× 10/25 GbE or 2× 10/25 GbE + 2× 40/100 GbE	
Max Throughput	2 GByte/s	4 GByte/s	8 GByte/s
Max Storage (Raw)	1.5 PB	2.5 PB	2.5 PB
*Max Effective Hybrid	3 PB	5 PB	5 PB
Max NVMe Flash (Raw)	180 TB	360 TB	720 TB
*Max Effective NVMe Flash	360 TB	720 TB	1.5 PB
Expansion Shelves	1x ES24, ES60	1x ES24, ES60, or ES102	1x ES24, ES60, or ES102
Average Power Draw	200 Watts	300 Watts	400 Watts
Peak Power Draw	250 Watts	350 Watts	450 Watts
Heat Output	700 BTU/h	1000 BTU/h	1400 BTU/h

^{*} Maximum effective capacity assumes typical data reduction through compression and deduplication.

TrueNAS Enterprise Specifications

Block-Based Protocols File-Based Protocols **Object Protocols Directory Services** AFP, FTP, iSCSI · S3-compliant using MinIO Active Directory (AD) NFSv3, v4 WebDAV OpenStack Cinder LDAP, NIS Networking **High Availability** Virtualization File System **Data Mobility** · Port Trunking/NIC Teaming Supports VMware and VAAI, ESXi OpenZFS Self-healing file system · Available dual controller Asynchronous file IEEE 802.3ad link aggregation snapshot integration, Immutable Snapshots and clones replication using Syncthing IEEE 802.1q VLAN support VM Warn/Stun, vCenter Supports KVM, Citrix XenServer, Thin and thick provisioning Online capacity expansion Automated rapid failover Data ingest and export to and from any SMB/NFS without data loss Virtual IP address Microsoft Hyper-V, and other Virtual block devices common hypervisors In-line compression and deduplication migration Microsoft VSS, ODX, and CSV ZFS Stripe, Mirror, RAID-Z1/Z2/Z3, dRAID Online software updates Integrated Apps **Supported Public Cloud Providers TrueSecure Security Remote Administration** Backup

- Snapshot-based OpenZFS local/
- remote replication Rsync and cloudsync
- Truecloud backup to Storj
- Supports Asigra, Acronis, Veeam, Nakivo, NetBackup, and
- iX-Storj
- Amazon S3
- BackBlaze B2 Cloud Google Cloud
- Microsoft Azure
- · FIPS 140 for Data-at-rest and data-in-flight
- Restricted Admins (Security, Storage, Monitor)
- Auditing of SMB & Admin events (e.g. logins)
- Encrypted Drives and Datasets, KMIP NIST 800-209, GP-OS STIG
- Alert notifications via email, AWS-SNS, Hipchat, InfluxDB, Slack, Mattermost, OpsGenie, PagerDuty, and VictorOps
- SSH, Syslog, Netdata
- REST APIs and SNMP Automated backup of system configuration and state
- Graphical reporting, enclosure management
- Signed updates with the ability to rollback Out-of-Band Management